

netis

Продуктова лінійка 2025

- ✓ Wi-Fi роутери
- ✓ Wi-Fi адаптери
- ✓ Комутатори
- ✓ PoE коммутатори
- ✓ Wi-Fi точки доступу
- ✓ SMB маршрутизатори

www.netis.ua
support@netis.ua




З питань технічної
підтримки відскануйте QR-код



Photo	Model Name	Description	Main Feature
AC1200 Gigabit Router			
	N2	AC1200 Dual Band Gigabit WiFi5 Router	1200Mbps 11AC, 1* GE WAN, 4* GE LAN Port, WPS(Mesh) & Default Button, 4* 5dBi Antenna, Support Mesh, TR069 & Fota
	N3	AC1200 Dual Band Gigabit WiFi5 Router	1200Mbps 11AC, 1* GE WAN, 3* GE LAN Port, WPS(Mesh) & Default Button, 4*5dBi Antennas, Support TR069 & Fota
AC1200 Fast Router			
	NC21	AC1200 Dual Band Fast WiFi5 Router	1200Mbps 11AC, 1* FE WAN, 3* FE LAN Port, WPS & RESET Button, 4* 5dBi Antenna, Support TR069 & Fota
	N5	AC1200 Dual Band Fast WiFi5 Router	1200Mbps 11AC, 1* FE WAN, 2* FE LAN Port, USB2.0, WPS & RESET Button, 4* 5dBi Antenna, Support USB Dongle TR069 & Fota
	N3D	AC1200 Dual Band Fast WiFi5 Router	1200Mbps 11AC, 1* FE WAN, 3* FE LAN Port, WPS, RESET, Power On/Off Button, 4* 5dBi Antenna, Support TR069 & Fota
	N4	AC1200 Dual Band Fast WiFi5 Router	1200Mbps 11AC, 1* FE WAN, 2LAN, WPS& RESET Button, 4* 5dBi Antenna, Support Fota
N300 Router			
	WF2409E	300Mbps Wireless N Router	300Mbps 11N, 1* FE WAN, 4* FE LAN Port, WPS & Default Button, 3*5dBi Fixed Antennass, Support TR069 & Fota
	WF2419E	300Mbps Wireless N Router	300Mbps 11N, 1* FE WAN, 4* FE LAN Port, WPS & Default Button, 2*5dBi Fixed Antennass, Support TR069 & Fota
	W1	300Mbps Wireless N Router	300Mbps 11N, 1* FE WAN, 2* FE LAN Port, WPS & Default Button, 2*5dBi Fixed Antennass, Support TR069 & Fota
	W4	300Mbps Wireless N Router	300Mbps 11N, 1* FE WAN, 2* FE LAN Port, WPS & Default Button, 4*5dBi Fixed Antennass, Support TR069 & Fota
N150 USB Adapters			
	WF2120 PRO	150Mbps Drive-free WiFi Adapter	IEEE 802.11b/g/n 2.4GHz, 1* 2dBi Internal antenna, USB2.0, Up to 150Mbps, Free drive, Plug and play
AC650 USB Adapters			
	WF2160C	Up to 650 Mbps Wi-Fi adapter	IEEE 802.11b/g/n/ac, 1* 2dBi Internal antenna, USB2.0, RTL8811CU, Soft AP
	WF2160	Up to 650 Mbps Wi-Fi adapter	IEEE 802.11b/g/n/ac, 1* 6dBi External antenna, USB2.0
PCI-E Adapters			
	F0	Up to 1300 Mbps Wi-Fi adapter PCI-E	IEEE 802.11b/g/n/ac, 2* 5dBi External antenna, PCI-E
	F1	Up to 3000 Mbps Wi-Fi adapter PCI-E	IEEE 802.11b/g/n/ac, 2* 5dBi External antenna, PCI-E, Bluetooth 5.0
	F2	Up to 5400 Mbps Wi-Fi adapter PCI-E	IEEE 802.11b/g/n/ac, 2* 5dBi External antenna, PCI-E, Bluetooth 5.2

Приклади комплексних SMB

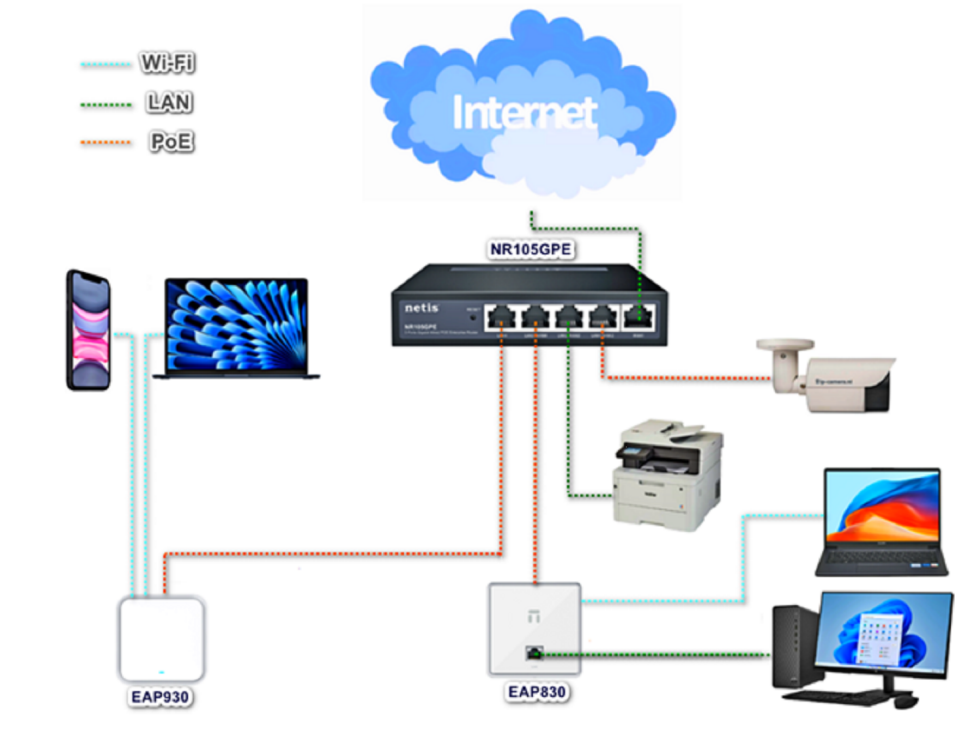

AP

	EAP912	AC1200 Wireless Gigabit Ceiling Mount Access Point	1200Mbps 11AC, 1* GE WAN+1* GE LAN(POE power supply), 2* built-in antennas, 128MB Memory, Recommended number of connected devices: 80 AP Management, Default Button, Ceiling / Wall Mounting
	EAP930	AX3000 Wireless Gigabit Ceiling Mount Access Point	3000Mbps 11AX,WiFi6, 1* GE WAN+1* GE LAN(POE power supply), 5* built-in antenna, 256MB Memory, 128MB Flash, Recommended number of connected devices: 80 AP Management, Ceiling / Wall Mounting
	EAP812	AC1200 Wireless Gigabit Panel Access Point	1200Mbps 11AC, 1* GE WAN+1* GE LAN(POE power supply), 2* built-in antenna, 128MB Memory, Recommended number of connected devices: 80 AP Management, Default Button, Support SSID hiding
	EAP830	AX3000 Wireless Gigabit WiFi6 Panel Access Point	3000Mbps 11AX, WiFi6, 1* GE WAN+1* GE LAN(POE power supply), 2* built-in antennas, 256MB Memory, Recommended number of connected devices: 100 AP Management, Default Button, Support SSID hiding


SMB Router

	NR100G	5-Port Gigabit Multi-WAN Port Internet Behavior Management Enterprise Router	5*Gigabit RJ45 Port, 1-4 variable WAN ports, Load Balancing, AP Management, Recommended number of connected devices: 200, Manage AP: 100, PPPoE Server, Multi-IP Network, DHCP Server,QOS, APP Management, DHCP Client, Static IP, MAC Cloning
	NR200G	5-Port Gigabit Multi-WAN Port Internet Behavior Management Enterprise Router	5* Gigabit RJ45 Port, 1-4 variable WAN ports, Load Balancing, AP Management, Recommended number of connected devices: 400, Manage AP: 200, PPPoE Server, Multi-IP Network, DHCP Server, QOS, APP Management, DHCP Client, Static IP, MAC Cloning

Photo	Model Name	Description	Main Feature
SMB POE Router			
	NR105GPE	 5-Port Gigabit Enterprise-Class POE Router	1* GE WAN Port+4* GE LAN(support POE), 1-4 WAN/LAN port, Machine Budget 60W, Recommended number of connected devices: 200, Manage AP: 100, PPPoE Server, Multi-IP Network, DHCP Server, QOS, APP Management, DHCP Client, Static IP, MAC Cloning
	NR109GPE	 9-Port Gigabit Enterprise-Class POE Router	1* GE WAN Port+8* GE LAN(support POE), 1-4 WAN/LAN port, Machine Budget 130W, Recommended number of connected devices: 200, Manage AP: 100, PPPoE Server, Multi-IP Network, DHCP Server, QOS, APP Management, DHCP Client, Static IP, MAC Cloning
Web Smart POE Switch			
	ST210GPD-2G	 Full Gigabit Cloud-manmaged POE Switch	2*GE RJ45 Port+8*GE POE LAN Port, 20G backplane bandwidth, 8K MAC address table Size, Machine Budget: 130W, IEEE 802.3af/at standard protocol, Port isolation setting, Port POE switch, Firmware upgrade,etc.
	ST220GPR-2G2S	 Full Gigabit Cloud-manmaged POE Switch	2GE+2SFP+16GE POE Ports, 40G backplane bandwidth, 8K MAC address table size, Machine Budget: 250W, IEEE 802.3af/at standard protocol, Port isolation setting, Port POE switch, Firmware upgrade,etc.
	ST228GPR-2G2S	 Full Gigabit Cloud-manmaged POE Switch	2GE+2SFP+24GE POE Ports, 56G backplane bandwidth, 8K MAC address table size, Machine Budget: 400W, IEEE 802.3af/at standard protocol, Port isolation setting, Port POE switch, Firmware upgrade,etc.

Enterprise Wireless Networking Solution

Gigabit access, 2.5G uplink, optical fiber convergence, monitoring wireless hybrid networking.

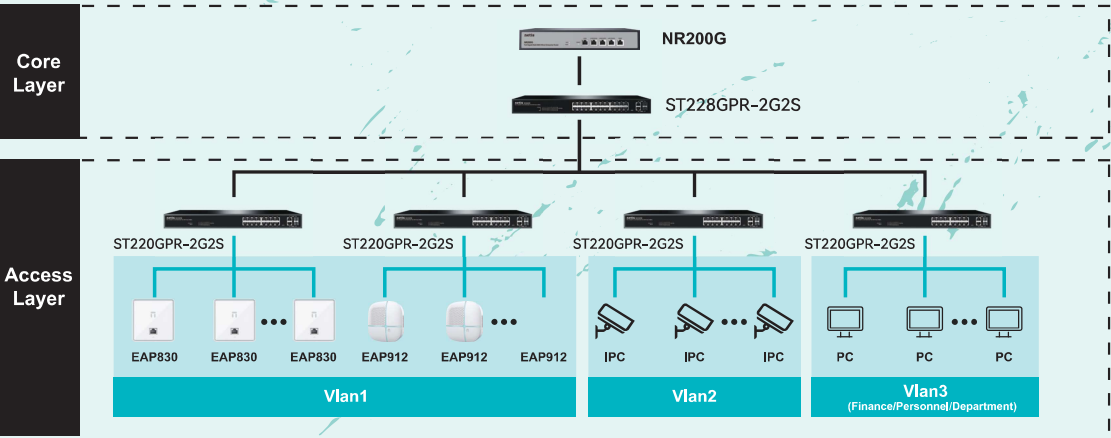


- Higher specifications: AX3000, uplink 2.5G port, 2.5G gateway
- Larger capacity: up to 120 units can be effectively carried by a single AP
- Smarter roaming: solving the problem of sticky terminals

— Normal Network Cable
- - - POE Power Line

Whole House Wi-Fi Coverage Solution

Villa/large unit/high-end home networking set.

NR105GPE is an enterprise router that supports POE power supply. It can directly power the AP through network cables without the need for separate POE switches, saving overall networking costs and making it simple and easy to use.

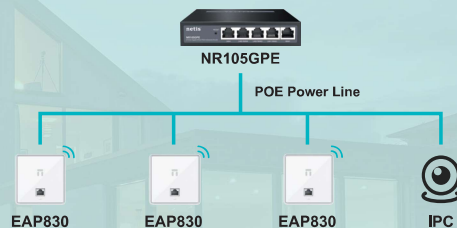

4G LTE Wireless Router

MW5360



3G/4G SIM Card



4G Antenna + WiFi Antenna



SIM Card or WAN Access Available



Transform 4G Signal to Wireless



4G/5G LTE

Photo Model Name Description Main Feature

4G/5G LTE



MW5360

300Mbps Wireless 4G LTE Router

300Mbps 11N, Slot for 3G/4G SIM Card, Plug & Play 2* 5dBi 4G Detachable Antennas, 2* 5dBi WiFi Antennas, Support cat4 & Fota



MW5630

AX3000 Wireless 4G LTE CAT6 (M2) Router with USB 3.0

Up to 3000 Mbps AX3000, Slot for 3G/4G Card, 2*5dBi 4G Detachable Antennas, cat6 modem on M2 slot, USB3.0

DSL

DSL



DL4323

300Mbps Wireless N ADSL

300Mbps 11N, 1* ADSL Port, 4* FE LAN Port Power & Default Button, 2* 5dBi Antenna, Support TR069

Outdoor IP65 Protection

Adaptable to A Variety of Harsh Environments



Waterproof and dust-proof



High temperature resistant



Low temperature resistant

Wireless Bridge

Wireless Bridge



NB50


Enterprise Outdoor Digital Bridge

1FE LAN+1FE POE port, IP65 Outdoor protection level, 1* 14dBi Internal Antenna, 3KM wireless long-range transmission

BRAND NEW WIFI MANAGEMENT APP



You can remotely manage your router through the BeeWiFi application

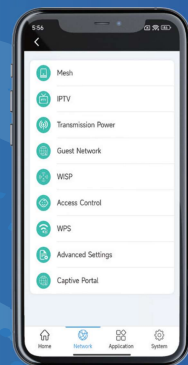

SCAN HERE TO GET



Google Play



App Store for IOS



Download on the

App Store

Photo	Model Name	Description	Main Feature
WiFi6 Router			
	NX62	 AX6000 Dual Band Gigabit WiFi6 Router	6000Mbps 11AX, 1* 2.5G WAN, 1*2.5G LAN, 3* GE LAN Port, USB3.0, Mesh(WPS), RESET, Power On/Off Button, 8* 5dBi Antenna, Support Router Mode & Mesh Mode Based on OpenWRT, Support TR069 TR181 TR143 & Fota
	NX30	 AX3000 Dual Band Gigabit WiFi6 Router	3000Mbps 11AX, 1* GE WAN, 3* GE LAN Port, Mesh(WPS) & RESET Button, 5* 5dBi Antenna, Support Router Mode & Mesh Mode Based on OpenWRT, Support TR069 TR181 TR143 & Fota
	NX31	 AX3000 Wireless Dual Band WiFi6 Router	3000Mbps 11AX, 1* GE WAN, 3* GE LAN Port, Mesh(WPS), RESET, Power On/Off Button, 4*5dBi Antennas, Support Router Mode & Mesh Mode. Based on OpenWRT, Support TR069 TR181 TR143 & Fota
	N6	 AX1800 Dual Band Gigabit WiFi6 Router	1800Mbps 11AX, 1* GE WAN, 3* GE LAN Port, Mesh(WPS), RESET, Power On/Off Button, 4*5dBi Antennas, Support Router Mode & Mesh Mode. Based on OpenWRT, Support TR069 & Fota
	NX10	 AX1500 Dual Band Gigabit WiFi6 Router	1500Mbps 11AX, 1* GE WAN, 3* GE LAN Port, WPS(Mesh) & RESET Button, 4* 5dBi Antenna, Support Router Mode & Mesh Mode. Support TR069 & Fota
AC1200 Gigabit Router			
	NC65	 AC1200 Dual Band Gigabit WiFi5 Router	1200Mbps 11AC, 1* GE WAN, 3* GE LAN Port, WPS(Mesh) & RESET Button, 4* 5dBi Antenna, Support Mesh, TR069 & Fota
	NC63	 AC1200 Dual Band Gigabit WiFi5 Router	1200Mbps 11AC, 1* GE WAN, 3* GE LAN Port, RESET Button, 6*5dBi Antennas, Support Mesh, TR069 & Fota
	EAP883	 AC1200 Dual Band Gigabit router \ PoE Access Point	Up to AC1200Mbps 11AC, 2x 1 GB Ports (1 can be used as WAN port), Easy Mesh controller and agent options, Captive portal, PoE and PSU powered.

Wireless Router

CAPTIVE PORTAL


Captive Portal — це веб-сторінка, яка автоматично відображається під час підключенні користувача до мережі Wi-Fi. Вона служить для автентифікації користувачів, надання їм інформації чи організації оплати за користування інтернетом. Дана технологія користується попитом у громадських місцях, таких як готелі, ресторани, офіси та торгові центри, завдяки своїй зручності та функціональності.

На даний момент технологія Captive Portal доступна у таких моделях пристроїв Netis Systems:

- netis N6 (SOHO) - Wi-Fi 6 роутер AX1800 з USB 3.0
- netis NX30 (SOHO) - Wi-Fi 6 роутер AX3000
- netis NX31 (SOHO) - Wi-Fi 6 роутер AX3000
- netis NX32U (SOHO) - Wi-Fi 6 роутер AX3000 з USB 3.0
- netis NX62 (SOHO) - Wi-Fi 6 роутер AX6000 з USB 3.0
- netis MW5630 (SOHO) Wi-Fi 6 роутер AX3000 с LTE CAT6 (M2) та USB 3.0
- netis EAP883 (SMB) - Wi-Fi 5 PoE точка доступу з функцією роутера AC1200
- netis NR105GPE SMB мульти WAN маршрутизатор PoE з функцією контролера EAP



48V Standard POE Switch Series



PON

Photo	Model Name	Description	Main Feature
PON			
	GP2101	Single Port GPON ONT	1* 2.5G Pon, 1* GE LAN Port, Power & Default, Button, Support TR069 & Fota, Gpon APC or UPC
	GP2201	AC1200 Dual Band Gigabit WiFi5 GPON	1200Mbps 11AC, 1* 2.5G Pon, 4* GE LAN Port, 1* FXS, Power & WPS (MESH) & Reset Button, Support TR069, Gpon APC or UPC
	GP3001	AX3000 Dual Band Gigabit WiFi6 GPON	3000Mbps 11AX, 1* 2.5G Pon, 4* GE LAN Port, 2* FXS, USB3.0, Power & Default Button, Support TR069 & Fota, Gpon APC or UPC

Роутери для провайдерів

	W300A	N300 роутер netis W300A з потужним процесором 1 ГГц та підтримкою netis Agile	Netis W300A – Wi-Fi 4 (N300), до 300 Мбіт/с (2.4 ГГц), 4x LAN 100 Мбіт/с, 1x WAN 100 Мбіт/с, 3 антени 5 дБі, підтримка TR-069, Netis Agile Config.
	W1200AF	Wi-Fi 5 AC1200 роутер netis W1200AF з потужним 1 ГГц процесором та підтримкою netis Agile	Netis W1200AF – дводіапазонний Wi-Fi 5 (AC1200), до 300 Мбіт/с (2.4 ГГц) + 867 Мбіт/с (5 ГГц), 3x LAN 100 Мбіт/с, 1x WAN 100 Мбіт/с, 4 антени 5 дБі, підтримка Easy Mesh, TR-069, Netis Agile Config
	W1500AG	Wi-Fi 5 AC1200 гігабітний роутер netis W1200AG з потужним 1 ГГц процесором та підтримкою netis Agile	Netis W1200AG – дводіапазонний Wi-Fi 5 (AC1200), до 300 Мбіт/с (2.4 ГГц) + до 867 Мбіт/с (5 ГГц), 3x LAN 1 Гбіт/с, 1x WAN 1 Гбіт/с, 4 антени 5 дБі, підтримка TR-069, Netis Agile Config
	W1500AG	Wi-Fi 6 AX1500 гігабітний роутер netis W1500AG з потужним 1 ГГц процесором та підтримкою netis Agile	Netis W1500AG – дводіапазонний Wi-Fi 6 (AX1500), до 300 Мбіт/с (2.4 ГГц) + до 1200 Мбіт/с (5 ГГц), 3x LAN 1 Гбіт/с, 1x WAN 1 Гбіт/с, 4 антени 5 дБі, підтримка TR-069, netis Agile Config

Основні переваги netis Agile Config

- Гнучка настройка маршрутизаторів – редагування параметрів інтернет-з'єднання (WAN), SSID, паролів, часових поясів та інших налаштувань.
- Масова конфігурація – можливість одноразового налаштування великої кількості пристроїв, що особливо корисно для інтернет-провайдерів.
- Персоналізація та брендування – заміна логотипу провайдера, зміна імені моделі пристрою та інтерфейсу користувача.
- Захист параметрів – налаштування зберігаються навіть після скидання пристрою до заводських параметрів.
- Інтуїтивно зрозумілий інтерфейс – зручне програмне забезпечення з покроковими інструкціями.

netis Agile

POE Switch Series

Photo	Model No.	Ports	POE Power	Extend	Port VLAN	Watch Dog	Cloud Managed
10/100M FE POE+ FE Uplink							
	P106C	4FE+2FE	60W	✓	✗	✓	✗
	P110C	8FE+2FE	120W	✓	✗	✓	✗
10/100M FE POE+ 2GE Uplink							
	P110GH	8FE+2GE+1SFP	120W	✓	✗	✓	✗
	P116GH	16FE+2GE+1SFP	240W	✓	✗	✓	✗
	P124GH	24FE+(2GE+2SFP)COMBO	360W	✗	✗	✗	✗
10/100/1000M Full Gigabit							
	P106GC	4GE+1GE+1SFP	60W	✗	✓	✓	✗
	P107GS	4GE+1GE+1SFP +(1GE+1SFP)COMBO	65W	✗	✓	✓	✗
	P112GS	8GE+2GE+2SFP	120W	✗	✓	✓	✗
	P110GC	8GE+2GE	120W	✗	✓	✓	✗
	P116GC	16GE+2GE	240W	✗	✓	✓	✗
	P119GS	16GE+2GE+1SFP	240W	✗	✓	✓	✗
	P124GC	24GE+2SFP	360W	✗	3-24VLAN	✓	✗
POE Extender							
	P3502CE	POE Extender	2FE POE Output+1FE POE Input Ports 250M wire extending IP66 protection standard				

POE
Extender

Photo	Model Name	Description	Main Feature
Managed Switch			
	NMS5712	S5710 SERIES SWITCH	8*10/100/1000M Base-T, 4*1000M Base-X SFP/10GE SFP+, MAC: 16K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤22W
	NMS5754	S5710 SERIES SWITCH	48*10/100/1000M Base-T, 6*1000M Base-X SFP/10GE SFP+, MAC: 32K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤53W
	NMS5728	S5710 SERIES SWITCH	24*10/100/1000M Base-T, 4*1000M Base-X SFP/10GE SFP+, MAC: 16K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤22W
	NMS5728P	S5710 SERIES SWITCH	24*10/100/1000M Base-T POE, 4*1000M Base-X SFP/10GE SFP+, MAC: 16K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤450W
	NMS5728F	S5710 SERIES SWITCH	4*10/100/1000M Combo+20*SFP, 4*1000M Base-X SFP/10GE SFP+, MAC: 16K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤38W
	NMS5730	S5720 SERIES SWITCH	24*10/100/1000M Base-T, 4*1000M Base-X SFP/10GE SFP+, MAC: 32K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤39W
	NMS5730P	S5720 SERIES SWITCH	24*10/100/1000M Base-T POE, 4*1000M Base-X SFP/10GE SFP+, MAC: 32K, Memory: 512MB, Storage: 32MB, Power Consumption: ≤450W
	NMS5754	S5720 SERIES SWITCH	48*100/1000M/2.5G based-T, 4*10GSFP+, 2*40GQSFP, MAC: 16K, Memory: RAM 1G, Storage: Flash 128M, Power Consumption: ≤125W
	NMS5826	S5863 SERIES SWITCH	24*1000M Base-X SFP/10GE SFP+, 2*40G QSFP/2*100G QSFP28, MAC: 16K, Memory: RAM 1G, Storage: Flash 8G, Power Consumption: ≤125W
	NMS6854	S6862 SERIES SWITCH	48*10G SFP+, 2*40G QSFP, 4*100G QSFP28, 1+1 modular redundant power supply, two pluggable Fans, MAC: 128K, Memory: 1Gmb DDR2 memory, Storage: 32MB Flash memory, Power Consumption: ≤180W
	NMS6856	S6865 SERIES SWITCH	48*25G SFP+, 8*100G QSFP28, 1+1 modular redundant power supply, two pluggable Fans, MAC: 128K, Memory: 1Gmb DDR2 memory, Storage: 32MB Flash memory, Power Consumption: <180W

Dumb Switch Series 10/100M

Photo	Model Name	Description	Main Feature
5 Ports			
	ST3105C	5 Port, Fast Ethernet Switch 8 Pin of Port With Safety Lock(Separated)	5* 10/100Mbps Port, Green Power, Desktop Design, IEEE 802.3x flow control, Plug and play
	ST105D	5 Port, Fast Ethernet Switch 8 Pin of Port With Safety Lock(Attached)	5* 10/100Mbps Port, Green Power, Desktop Design, IEEE 802.3x flow control, Plug and play, Steel Housing
8 Ports			
	ST3108C	8 Port, Fast Ethernet Switch 8 Pin of Port With Safety Lock(Separated)	8* 10/100Mbps Port, Green Power, Desktop Design, Plug and play, IEEE 802.3x flow control
	ST108D	8 Port, Fast Ethernet Switch 8 Pin of Port With Safety Lock(Attached)	8* 10/100Mbps Port, Green Power, Desktop Design, Plug and play, IEEE 802.3x flow control, Steel Housing
16 Ports			
	ST3116P	16 Port Fast Ethernet Switch	16*10/100Mbps Port, Green Power, Desktop Design, Plastic housing
	ST3116S	16 Port Fast Ethernet Switch	16*10/100Mbps Port, Green Power, Desktop/13-inch Steel housing Design
24 Ports			
	ST3124P	24 Port Fast Ethernet Switch	24* 10/100Mbps Port, Green Power, Desktop Design, Plastic housing
	ST3124S	24 Port Fast Ethernet Switch	24* 10/100Mbps Port, Green Power, Desktop/13-inch Steel housing Design
5 Ports			
	ST3105GC	5 Port Gigabit Ethernet Switch With Safety Lock(Separated)	5* 10/100/1000Mbps Port, Green Power, Desktop Design
	ST105GD	5 Port Gigabit Ethernet Switch With Safety Lock(Attached)	5* 10/100/1000Mbps Prot, Green Power, Desktop Design, Steel Housing
8 Ports			
	ST3108GC	8 Port Gigabit Ethernet Switch With Safety Lock(Separated)	8* 10/100/1000Mbps Port, Green Power, Desktop Design
	ST108GD	8 Port Gigabit Ethernet Switch With Safety Lock(Attached)	8* 10/100/1000Mbps Prot, Green Power, Desktop Design, Steel Housing
16 Ports			
	ST3116GS	16 Port Gigabit Ethernet Switch	16* 10/100/1000Mbps Port, 13-inch Steel Case, Desktop/Rackmount Design
18 Ports (SFP)			
	ST3118GS-D	18 Port Gigabit Ethernet Switch	16* 10/100/1000Mbps Port, 2SFP Port, 13-inch Steel Case, Desktop/Rackmount Design
24 Ports			
	ST3124GS	24 Port Gigabit Ethernet Switch	24* 10/100/1000Mbps Port, 13-inch Steel Case, Desktop/Rackmount Design
26 Ports (SFP)			
	ST3126GS	26 Port Gigabit Ethernet Switch	24* 10/100/1000Mbps Port, 2SFP Port, 19-inch Steel Case, Rackmount Design

Dumb Switch Series 10/100/1000M